

(19)



JAPANESE PATENT OFFICE

PATENT ABSTRACTS OF JAPAN

(11) Publication number: **08121242 A**

(43) Date of publication of application: **14.05.96**

(51) Int. Cl

F02F 3/00
F16J 9/00

(21) Application number: **06267086**

(71) Applicant: **ISUZU MOTORS LTD**

(22) Date of filing: **31.10.94**


(72) Inventor: **SASAKI IWAO**

(54) PISTON FOR INTERNAL COMBUSTION ENGINE

(57) Abstract:

PURPOSE: To suppress local abrasion of a first ring groove.

CONSTITUTION: A first ring groove is formed in such a shape that a clearance (a) which is formed between the ring upper surface 2a of a first ring 2 to be positioned freely and a groove upper surface 6a, and a clearance (b) which is formed between a ring lower surface 2b and a groove lower surface 6b are respectively enlarged from a ring inner circumferential side toward a ring outer circumferential side, in the piston 1 for an internal combustion engine.

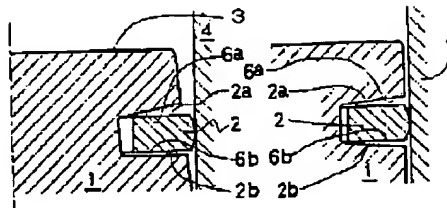

COPYRIGHT: (C)1996,JPO

BEST AVAILABLE COPY